




HT321 Digital Multimeter

CAT IV

Three Year Warranty

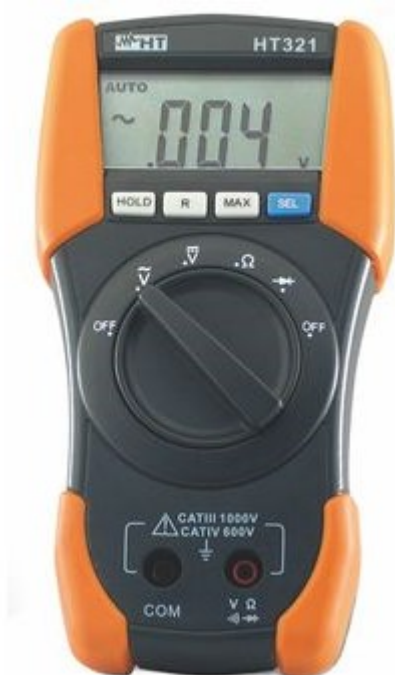

Features

- DC Voltage
- AC Voltage
- Resistance
- Continuity test with buzzer
- Diode test
- MAX function
- HOLD function
- Manual Range function
- Auto Power OFF

STANDARD ACCESSORIES

4413-2 : Test leads

Protection rubber holster

Battery

User manual

OPTIONAL ACCESSORIES

B80 : Soft Carrying Case



RAPID-TECH EQUIPMENT
For all your Test Equipment Requirements

1800 358 531
Web www.rapid-tech.com.au
E-Mail info@rapid-tech.com.au

1. ELECTRICAL SPECIFICATIONS

Accuracy is indicated as \pm (%rdg + numbers of digits) at 23°C \pm 5°C, <75%HR

DC VOLTAGE

Range	Resolution	Accuracy	Overload protection
200.0mV	0.1mV	$\pm(0.8\%rdg+1dgt)$	600VDC/ACrms
2.000V	0.001V		
20.00V	0.01V		
200.0V	0.1V		
600V	1V	$\pm(1.0\%rdg+2dgt)$	

Input impedance: 10M Ω

AC VOLTAGE


Range	Resolution	Accuracy (45 + 400Hz)	Overload protection
200.0mV	0.1mV	Not specified	600VDC/ACrms
2.000V	0.001V	$\pm(1.5\%rdg+3dgts)$	
20.00V	0.01V		
200.0V	0.1V		
600V	1V		

Input impedance: 10M Ω

RESISTANCE


Range	Resolution	Accuracy	Open voltage	Overload protection
200.0 Ω	0.1 Ω	$\pm(1.0\%rdg+8dgts)$	about 3.0V	600VDC/ACrms (< 30sec)
2.000k Ω	0.001k Ω	$\pm(1.0\%rdg+3dgts)$		
20.00k Ω	0.01k Ω			
200.0k Ω	0.1k Ω			
2.000M Ω	0.001M Ω	$\pm(3.0\%rdg+3dgts)$		
20.00M Ω	0.01M Ω			

DIODE TEST

Range	Resolution	Open voltage	Overload protection
	1mV	circa 1.5VDC	600VACrms (< 30sec)

Overload protection: 600Vrms

TEST CONTINUITY

Range	Buzzer	Open voltage	Overload protection
	R<120 Ω	about 1.5VDC	600VACrms (< 30sec)



RAPID-TECH EQUIPMENT

For all your Test Equipment Requirements

1800 358 531
 Web www.Rapid-tech.com.au
 E-Mail info@rapid-tech.com.au

2. GENERAL SPECIFICATIONS


Display:

- LCD display, 3 ½ digit with maximum reading 1999 counts with sign and decimal point
- Automatic polarity indication.
- "OL" over range indication

Features:

- MAX
- HOLD
- RANGE for manual selection
- Auto Power OFF after 15 minutes of don't work

Low battery indication:

- The symbol "  " appears when the battery voltage is low

Operating temperature:

- -5°C to 40°C, <80%HR

Storage temperature:

- -10°C to 60°C, <70%HR

General informations:

- Altitude max: 2000m
- Pollution degree: 2
- Insulation: double insulation

Power supply:

- 2 x 1.5V alkaline batteries type AAA MN2400 LR03 AM4

Sizes:

- 163(L)x88(W)x48(H) mm

Weight (included batteries):

- 280g



RAPID-TECH EQUIPMENT
For all your Test Equipment Requirements

1800 358 531
Web www.Rapid-tech.com.au
E-Mail info@rapid-tech.com.au